

Home Sight™

QUICK START GUIDE

by
vantiva



Quick Overview

Action

Unpack and Place
Connect power and HDMI
Follow on-screen steps

Time

2 Minutes
2 Minutes
~6 Minutes



Step 1: In the Box

Verify all components are included:

- HC200 Smart Camera
- USB-C Power Adapter
- HDMI Cable
- Remote Control


Use only the parts provided. Each is optimized for safety, compatibility, and performance.



Step 2: Camera Tour


Privacy Shutter Indicator Light

- Closes when idle
- Flashing Blue = Setup
- Solid Blue = Connected

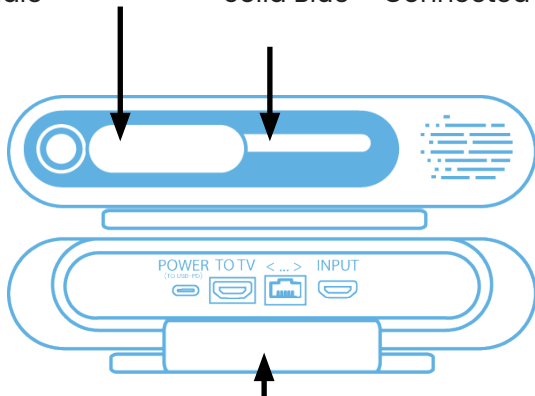


Rear Flap for TV or shelf placement.

Step 3: Mount Camera

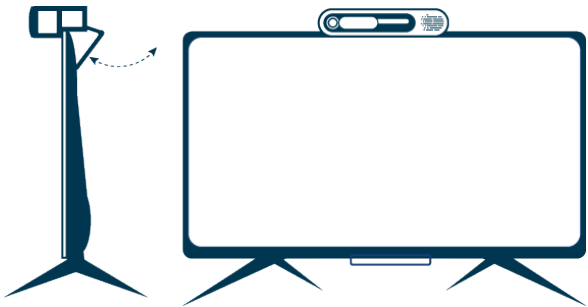

Use the front lip and rear flap to balance the camera securely on top of your television. The rear flap also acts as a base for safe shelf placement.

Step 4: Connection Map

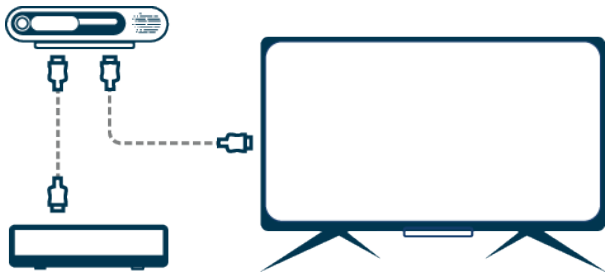

Use this diagram to see how everything connects before getting started. You'll complete these steps one by one in the next pages.

Step 5: Video Reciever



Connect your set-top box to the camera's HDMI IN port, not directly to the TV. This lets HomeSight add overlays during video calls and remote care sessions.

Step 6: Connect HDMI



Plug the HDMI cable into the “TO TV” port. Then, connect the other end to your television’s HDMI input.

Use an open port like HDMI 1 or HDMI 2. Remember the port—you’ll need it later.

Step 7: Connect Power



Order matters to ensure video signal is detected for HDMI handshake:

1. Power the camera first via USB-C.
2. Wait for blue light to stop blinking.
3. Then power on the set-top box.
4. Begin on-screen setup only after.

Step 8: Pair the Remote



Switch your TV to the correct HDMI input. The welcome screen will appear shortly. Follow the on-screen pairing prompt to connect the included remote control.

Step 9: Pairing Buttons



A red light above the mic button will flash when pairing is complete. This confirms the remote is now connected to your Smart Camera.

Step 10: Connect Wi-Fi

Wi-Fi Setup

How would you like to connect to the internet?

We recommend WPS or QR code so you don't have to type in any passwords. Choose Wi-Fi Scan to enter password manually.

Scan

WPS

QR Code

Manual

Forget Networks

After choosing your language and scanning for available networks, connect the SmartSight camera using your preferred method. You can also return to this screen in *Settings* to delete old networks.

Step 11: Wi-Fi Success

Wi-Fi Connection Successful

We'll now download the latest update - this could take a couple of minutes.

Next

The camera tell if you the Wi-Fi connections has been successful.

The camera will now check for software updates, which can take up to 15 minutes—keep the TV on until it's finished.

Step 12: TV Control

TV Control

We'll now help you setup your TV control for easy switching between your Smart Camera and watching TV.

[Next](#)[Skip](#)

This step enables TV Control so you can toggle between live TV and the HomeSight screen using the HomeSight remote. This allows you to watch and receive alerts with minimal disruption.

Step 13: Default TV Input

Which of these is your preference when watching TV?

TV Tuner


HDMI 1 (Chromecast)

HDMI 3

HDMI 4

Choose the HDMI input you use for live TV. This tells the camera where to take you when you exit the HomeSight screen. Use the arrows, then press OK to save.


Step 14: Scene Preview

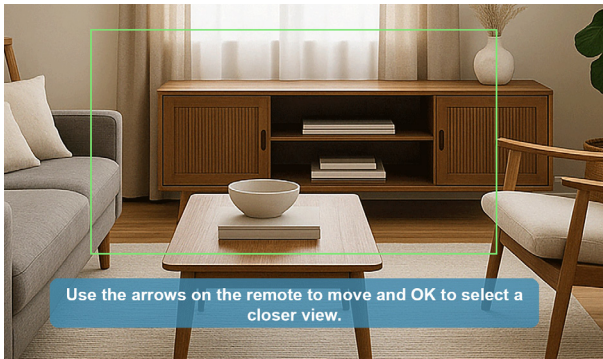

Use the arrows on the remote to move and OK to select a closer view.


The camera's shutter opens and shows a live view on your TV. A green frame marks what others will see during video calls. Adjust the camera as needed to frame your background settings.

Step 15: Assign a Room

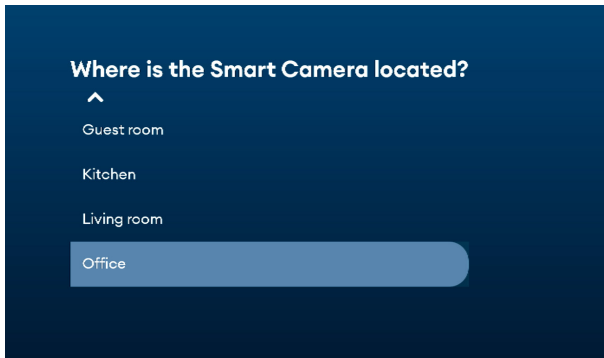

Scroll through the list using your remote. Select the room where this camera is set up. This helps label and organize your devices. Press OK to confirm and continue setup.

Step 16: You're all set!

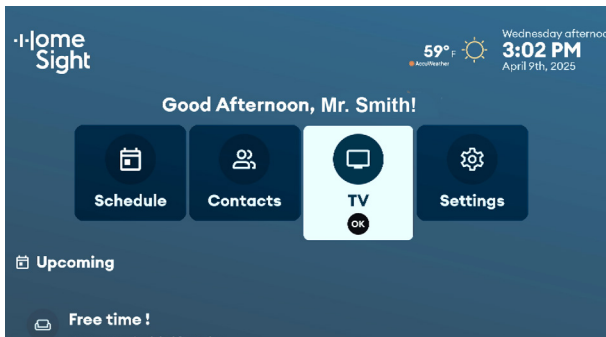

Congratulations! Setup is now complete.
Your HomeSight HC200 is ready to use.
You can now receive scheduled video calls
and support remote care and monitoring.

Get Help Online

Need help finishing setup or troubleshooting?

Scan the QRcode or visit:
support.homesight.care



Notices

This device is not a medical device and is not intended for diagnostic, therapeutic, or life-sustaining purposes. Maintain a minimum distance of 20 cm (approximately 8 inches) between the device and all persons during operation to comply with FCC and RF exposure guidelines.

This product is intended for indoor use only. Do not install or operate this device in wet environments or outdoors. Do not modify the device or attempt to load unauthorized firmware. Doing so voids all warranty and compliance guarantees.

The HomeSight HC200 complies with FCC Part 15, Class B.

Operation is subject to the following two conditions:

This device may not cause harmful interference.

This device must accept any interference received, including interference that may cause undesired operation.

Use of this product assumes compliance with local privacy laws and guidelines. It is the user's responsibility to ensure the device is used in accordance with all applicable legal and regulatory requirements.

© 2025 Vantiva. All rights reserved.

